




Model:TRX-DAS1

TruckX Door Sensor

Assembly Instruction


What's included:

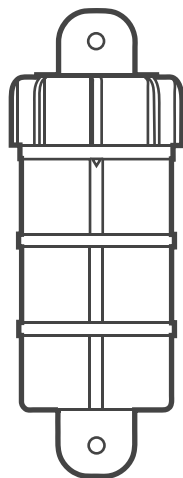

Door Sensor
1x



Screw
4x




Magnet
1x


Need Help?

Contact TruckX support at support@truckx.com,
[+1\(650\) 600-0008](tel:+16506000008), and live chat at www.TruckX.com


- 1** Open the Door Sensor's cap by rotating it anti-clockwise

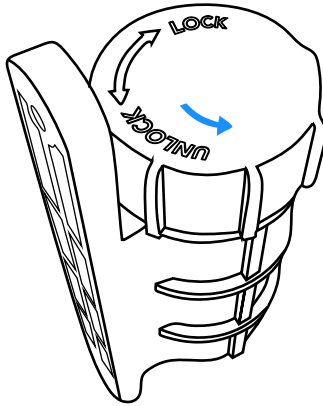


- 2** Remove the plastic strip from the battery

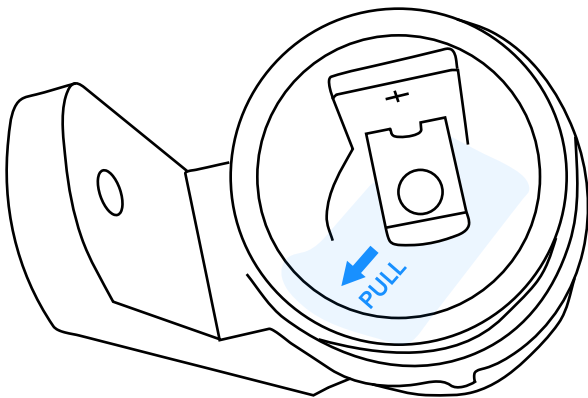

- 3** Close the back case by rotating it clockwise

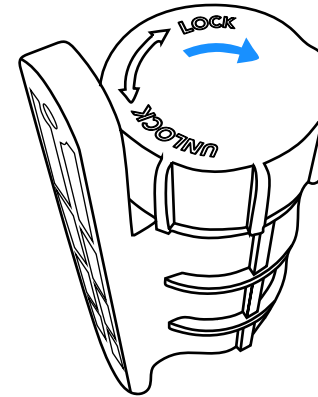

- 4** Please refer to below diagram. Another part is magnet part. To ensure the properwork, don't leave it too far or too closed to the sensor

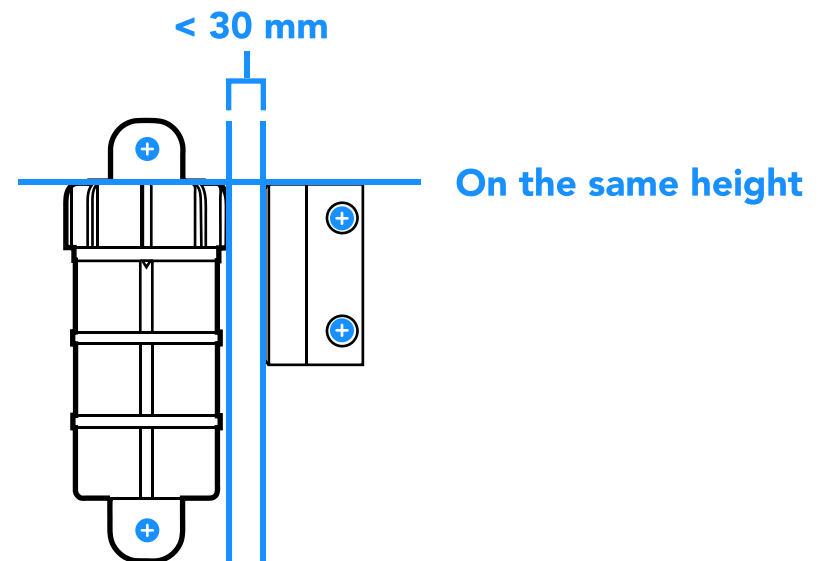



Need Help?

Contact TruckX support at support@truckx.com,
[+1\(650\) 600-0008](tel:+16506000008), and live chat at www.TruckX.com